



# RQDXE Expander Module

## User's Guide

Prepared by Educational Services  
of Digital Equipment Corporation

1st Edition, November 1985  
2nd Edition, March 1986

© Digital Equipment Corporation 1985, 1986  
All Rights Reserved.

The material in this manual is for informational purposes only and is subject to change without notice.

Digital Equipment Corporation assumes no responsibility for any errors that may appear in this manual.

**FCC Notice:** This equipment generates, uses, and may emit radio frequency energy. The equipment has been type tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such a commercial environment. Operation of this equipment in a residential area may cause interference in which case, the user, at his own expense, may be required to take measures to correct the interference.

Printed in U.S.A.

The manuscript for this book was created on a VAX-11/780 system and, via a translation program, was automatically typeset by Digital's DECset Integrated Publishing System. The book was produced by Educational Services Development and Publishing in Marlboro, MA.

The following are trademarks of Digital Equipment Corporation:

**digital**<sup>TM</sup>  
DEC  
DECmate  
DECUS  
DECwriter  
DIBOL  
MASSBUS

PDP  
P/OS  
Professional  
Rainbow  
RSTS  
RSX

RT  
UNIBUS  
VAX  
VMS  
VT  
Work Processor

## Contents

---

Description .....	1
Cabling Options .....	1
RQDXE-AA Option .....	2
RQDXE-FA Option .....	3
Module Specifications .....	5
Jumper Configurations .....	6

### Figures

1 RQDXE-AA Option .....	2
2 RQDXE-FA Option .....	4
3 RQDXE Jumper Settings for a BA23-A CPU Box .....	7
4 RQDXE Jumper Settings for a BA23-C Expansion Box .....	8
5 RQDXE Factory Jumper Configuration .....	9



## RQDXE Expander Module

---

### **DESCRIPTION**

This guide shows you how to install and configure the RQDXE dual-height expander module. The RQDXE (Digital part number M7513) is a replacement for the RQDX1-E extender module (Digital part number M7512).

The RQDXE lets you expand the RQDXn (RQDX1, RQDX2 and RQDX3) controller modules to support external drives (RD5n and RX50). The RQDXE carries RQDXn controller signals to external MSCP (mass storage control protocol) devices.

The enhanced features of the RQDXE allow support of up to four logical units.

You should install the RQDXE, dual-height module in a backplane slot directly below or next to the RQDXn.

### **CABLING OPTIONS**

There are two cabling options available to connect RQDXE modules with RQDXn controller modules and disk drives.

- RQDXE-AA
- RQDXE-FA

### RQDXE-AA Option

The RQDXE-AA option includes the following parts.

- RQDXE module
- BC02D-01 cable
- Cable assembly 17-01223-01 or 70-20691-01

Figure 1 shows the RQDXE-AA option. Cable assembly 17-01223-01 or 70-20691-01 has a mounting plate to connect the RQDXE and the I/O distribution panel on the BA23-A CPU box. The I/O distribution panel connects to a desktop or rackmount expansion box via an external cable. Cable BC02D-01 comes with the RQDXE and connects the RQDXE to the applicable RQDXn controller.

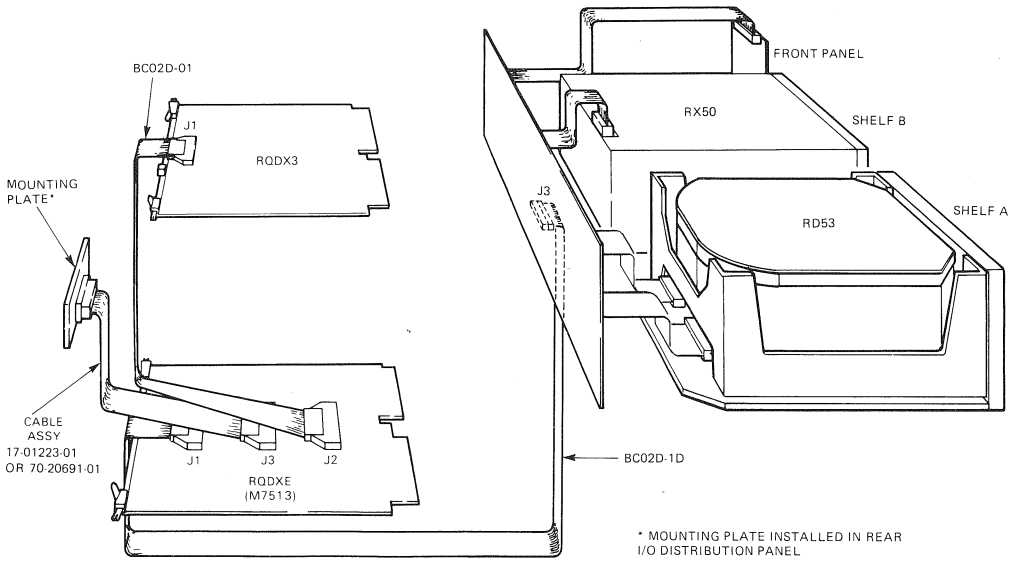


Figure 1 RQDXE-AA Option

### **RQDXE-FA Option**

The RQDXE-FA option includes the following parts.

- RQDXE module
- BC02D-01 cable
- BC02D-04 cable

Figure 2 shows the RQDXE-FA option. Cable BC02D-01 connects the RQDXE to the RQDXn controller. Cable BC02D-04 connects the RQDXE to the distribution panel on the BA23-C expansion box.

#### **NOTE**

**Figures 1 and 2 use the RQDX3 as a typical example. You can also use the RQDX1 or the RQDX2 with the RQDXE.**

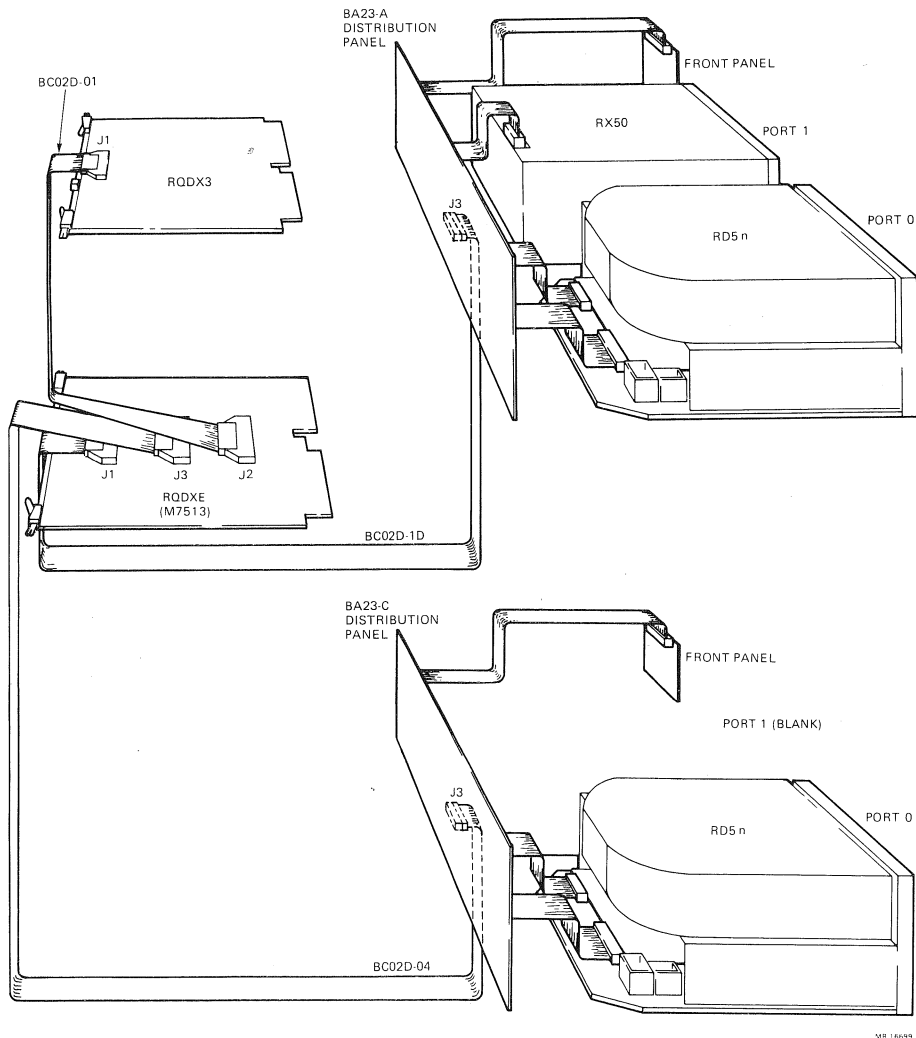


Figure 2 RQDXE-FA Option



## MODULE SPECIFICATIONS

### Dimensions

Height	22.8 cm (8.9 in)
Width	1.27 cm (0.5 in)
Length	13.34 cm (5.25 in)

### Power Consumption

Typical	+5 Vdc $\pm 5\%$ @ 0.80 Amps
Maximum	+5 Vdc $\pm 5\%$ @ 0.90 Amps

### Operating Requirements

Operating temperature mounted in cabinet	0° to 60°C (32° to 140°F)
Maximum outlet Temperature	5°C above 60°C (9°F above 140°F)
Relative humidity	10 to 90% noncondensing

### Storage Requirements

Ambient temperature	-40° to +65°C (-40° to 149°F)
Relative humidity	10 to 90% noncondensing
Maximum altitude	9.1 km (50,000 feet)

### Bus Loads

DC	1 unit load
AC	0 unit load

## JUMPER CONFIGURATIONS

Figures 3, 4 and 5 show RQDXE jumper settings for different systems. Figure 3 is for a BA23-A CPU box. Figure 4 is for a BA23-C expansion box. Figure 5 is for an RD5n-D/-R or RXnn-D/-R mass storage tabletop or rackmount enclosures. These figures show the most common configurations. Figure 6 shows the RQDXE factory jumper configuration and the layout of the points to jump.

Figures 3 and 4 together show jumper settings required to support BA23-A/BA23-C configurations.

Figures 3 and 5 together show jumper settings required to support BA23-A/RD5n-D/-R or RXnn-D/-R configurations.

## CPU and Expansion Box Terms

Figures 3 and 4 use the following terms to describe the CPU box (BA23-A) and expansion box (BA23-C).

*Ports 0 and 1* identify the location of the drives in the BA23-A and BA23-C boxes.

CPU BOX (BA23-A  
AND BA23-C)


PORT 0	PORT 1	FRONT PANEL
-----------	-----------	----------------

MR-1675B

*CPU box* simply refers to the box in which the RQDXn controller resides.

The same terms apply to systems with disks in desktop or rackmount enclosures (external drives). In a desktop or rackmount enclosure, connector J1 is port 0 and J2 is port 1 (see below).

RD0, RD1, RD2 or RD3 designate the RD5n hard disks.

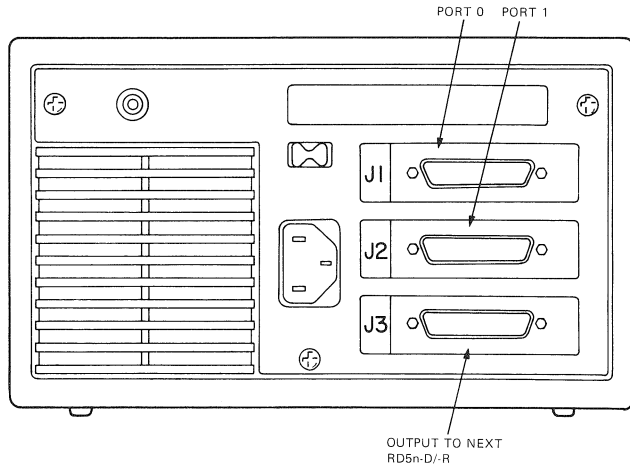

MR-0286-0268

To configure the RQDXE to meet your system requirements, do the following:

- *For a CPU box (BA23-A)*

Install jumpers as shown in Figure 3. Use the column (A through C) that applies to your system. Pick column B if you have an RD0 in port 0 and an RX50 in port 1 of the CPU box, as shown in Figure 1.

- *For an expansion box (BA23-C)*

Install jumpers as shown in Figure 4. Use the column (A through C) that applies to your system. Pick column A if you have an RD1 in port 0 of the BA23-C, as shown in Figure 2.

- *For mass-storage tabletop enclosures (RD5n-D/-R or RXnn-D/-R)*

Install jumpers as shown in Figure 5.

## NOTES

- **RD0 must be in port 0 in the BA23-A box.**
- **PORT 0 RD (drive select setting) must be 3.**
- **RX selects should be 1-2 for the first RX50 (factory configuration).**
- **The RQDXE occupies one dual Q-Bus slot in the backplane.**
- **RQDXn can be an RQDX1, RQDX2 or RQDX3.**

		A	B	C
PORT 0	RD0	X	X	-
PORT 1	RD1 RX50	- -	- X	- X
INT PORT SEL	N1 N2			
	N3 N4			
	P1 P2			

NOTES

1. RD0 MUST BE IN PORT 0 IN THE BA23-A CPU BOX
2. "O" IS A PIN; "-" OR " | " IS A JUMPER.
3. NO TWO RD5n DISK DRIVES SHOULD ATTEMPT TO MAP THE SAME LUN (CPU OR EXPANSION BOX) OR RESIDE IN THE SAME BA23 BOX.
4. COLUMN A OR C REPRESENTS FACTORY JUMPER CONFIGURATIONS.
5. AND INDICATE JUMPERS INSTALLED.

MR-0286-0292

Figure 3 RQDXE Jumper Settings for a BA23-A CPU Box

		A	B	C
PORT 0	RD1	X	X	-
	RD2	-	-	-
PORT 1	RD1	-	-	-
	RD2	-	-	-
	RX50	-	X	X
RDY AND WRT PROT	A1 A2			
	A3 A4			
	B1 B2			
	B3 B4			
	C1 C2			
	C3 C4			
	D1 D2			
	D3 D4			
DRV SEL	E1 E2			
	E3 E4			
	F1 F2			
	F3 F4			
	H1 H2			
	H3 H4			
DRV ACK	K1 K2			
	K3 K4			
EX PORT SEL	L1			
	L3 L4			
	M1 M2			
	M4			

NOTE:  
COLUMN A REPRESENTS  
THE FACTORY CONFIGURATION.


MR-0286-0291

Figure 4 RQDXE Jumper Settings for a BA23-C  
Expansion Box

		A	B	C	D
J1 PORT 0	RD1	X	X	-	-
	RX50	-	-	X	X
		-	-	-	-
J2 PORT 1	RD1	-	-	-	X
	RD2	-	X	-	-
		-	-	-	-
RDY AND WRT PROT	A1 A2				
	A3 A4				
	B1 B2				
	B3 B4				
	C1 C2				
	C3 C4				
	D1 D2				
	D3 D4				
DRV SEL	E1 E2				
	E3 E4				
	F1 F2				
	F3 F4				
	H1 H2				
	H3 H4				
DRV ACK	K1 K2				
	K3 K4				
EX PORT SEL	L1				
	L3 L4				
	M1 M2				
	M4				

MR-0286-0290

Figure 5 RQDXE Jumper Settings for RD5n-D/-R or RXnn-D/-R Add-On Drives

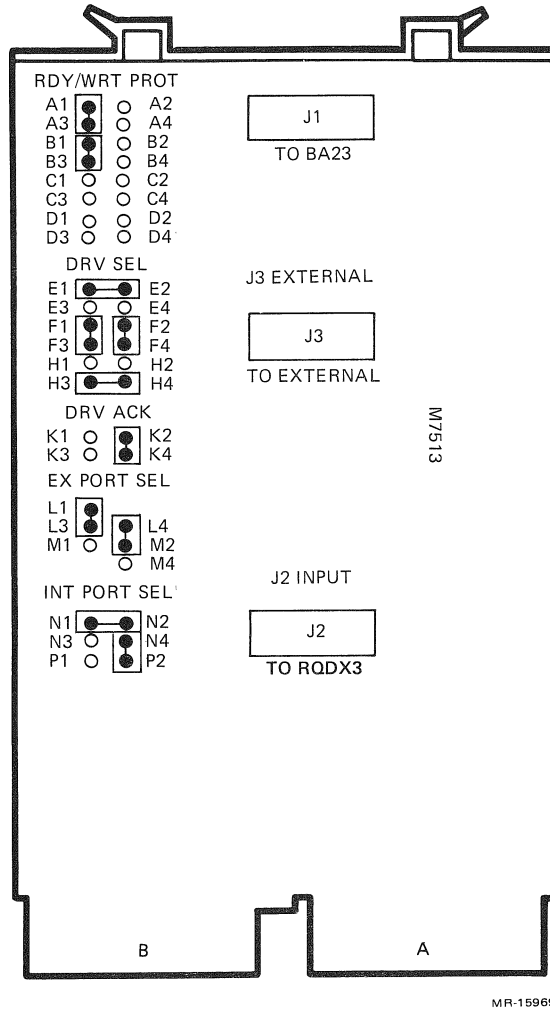

MR-15969

Figure 6 RQDXE Factory Jumper Configuration

